

FW215-300

Transportable Freeway System



Features


- * Shock-resistant disk drive bay design for 5.25" DVD+/-RW and removable 3.5" hard disk or flash disk drive
- * Bidirectional to mount chassis on wall or workbench
- * Easy to maintain system fan and filter
- * 300 Watt Power Supply
- * Supports up to 24 serial ports (using 3 PCI slots)
- * Two 10/100/1000 Ethernet LAN Connections are standard, and 4 PCI plus 1 PCIe slots are available to accommodate either Intelligent Communications Processor (ICP) boards (which manage the serial ports; maximum of 3), or additional Ethernet interfaces
- * A hard disk or flash disk can be used for local storage of boot parameters and custom network applications.

CE FCC


Specifications

Model Name		FW215-300
Drive Bay	5.25"	1
	3.5"	2 (1 front-accessible, 1 internal)
Front I/O Interface	USB 2.0	2
Cooling	Fan	1 (9 cm / 51.5 CFM)
	Air Filter	Yes
Miscellaneous	LED Indicators	Power and HDD
	Control	Power switch and reset button
Environment	Temperature	0 ~ 40° C (32 ~ 104° F), operating
	Humidity	10 ~ 85% @ 40° C, non-condensing
Physical Characteristics	Dimensions (W x H x D)	174 x 254 x 396 mm (6.9" x 10" x 15.6")
	Weight	9 kg (19.8 lb) without ICP cards 10.9 kg (24 lb) with ICP cards

Front View

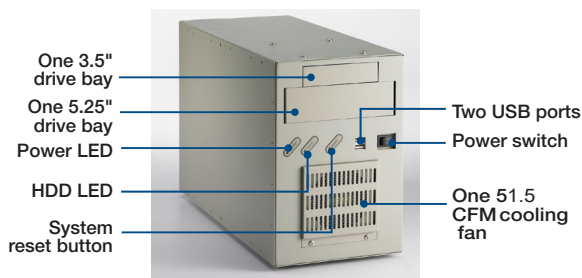

Inside View

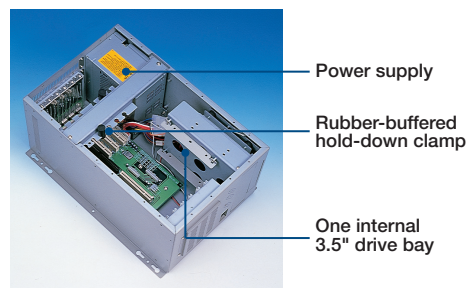


Protogate ICP2432 cards (PCI or PCIe)
(Available per customer requirements)



51.5 CFM
easy-to-maintain cooling fan


Dimensions

Unit: mm [inch]

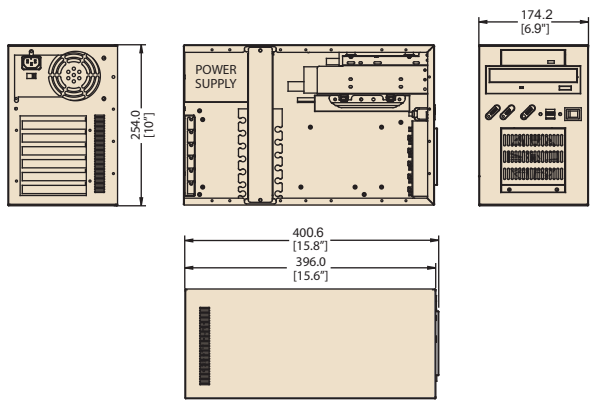

Installation

Unit: mm [inch]

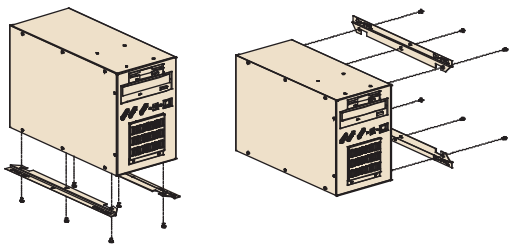

Bidirectional mounting

